


DSP500

Digital Signage Player with 9th/8th Gen Intel® Core™ i7/i5/i3 & Pentium® Processor, 3 HDMI 2.0, 4 USB and GbE LAN

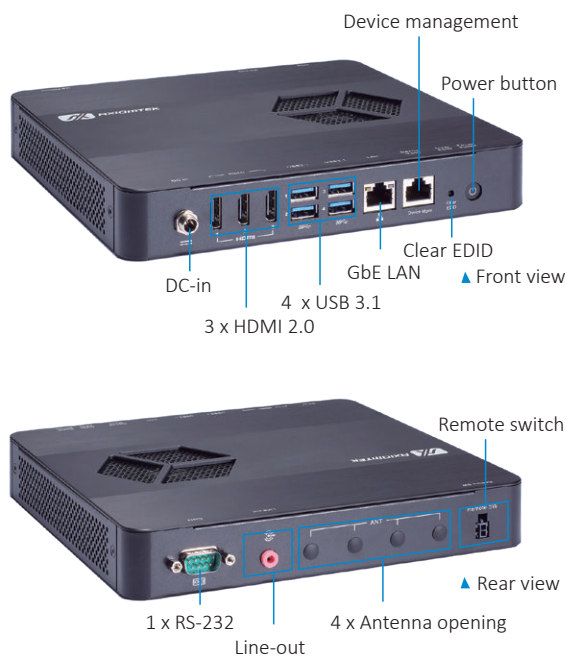

Features

- 9th/8th gen Intel® Core™ i7/i5/i3 & Pentium® processor
- 2 DDR4-2400 SO-DIMM for up to 32GB of memory
- 3 HDMI 2.0
- 4 USB 3.1 and 1 GbE LAN
- 1 M.2 Key E 2230 slot for Wi-Fi/BT
- 1 M.2 Key B 3042 slot for 4G LTE
- 1 M.2 Key M 2280 slot for storage



Specifications

CPU	LGA1151 9th/8th gen Intel® Core™ i7/i5/i3 or Pentium® processor, TDP up to 35W (Coffee Lake)
System Memory	2 x DDR4-2666 SO-DIMM, up to 32GB
Chipset	Intel® Q370
Storage	1x M.2 Key M 2280 slot (SATA & NVMe)
TPM	TPM 2.0
Watchdog Timer	255 levels, 1 to 255 sec./min.
System I/O Outlet	1 x 10/100/1000 Mbps Ethernet 4 x USB 3.1 3 x HDMI 2.0 1 x Line-out 1 x RS-232 1 x Device management 1 x Remote switch 1 x Screw type VDC power input 1 x VDC power input connector 4 x Antenna opening
Expansion Interface	1 x M.2 Key E 2230 for Wi-Fi/BT 1 x M.2 Key B 3042 for 4G/LTE 1 x SIM card slot
Battery Lithium	Lithium 3 V/220 mAH
Power Input	+12V DC-in
Dimensions	202 mm (7.95") (W) x 196 mm (7.71") (D) x 39 mm (1.53") (H)
Weight (net/gross)	1.8 kg (3.96 lb)/2.8 kg (6.17 lb)
Operating Temperature	0°C to +45°C (+32°F to +113°F)
Humidity	10%- 90% relative humidity, non-condensing
Certifications	CE, FCC class A
EOS Support	Win 10 IoT, Linux
Software Support	RDM

Ordering Information

Standard

DSP500 (P/N: E22K500100)	Digital signage player with Intel® 9th/8th gen Intel® Core™ i7/i5/i3 & Pentium® processor, 3 HDMI, 4 USB 3.1, GbE LAN
-----------------------------	---

Optional

VESA & Wall mount kit	
DDR4 SO-DIMM	8GB- 32GB
Wireless LAN Kit	Wi-Fi module and antenna
Storage	M.2 Key M 2280 (SATA & NVMe)

Packing List

4 x Foot pad

Dimensions

